


OUTDOOR Large Displays 4L20C and 4L40C

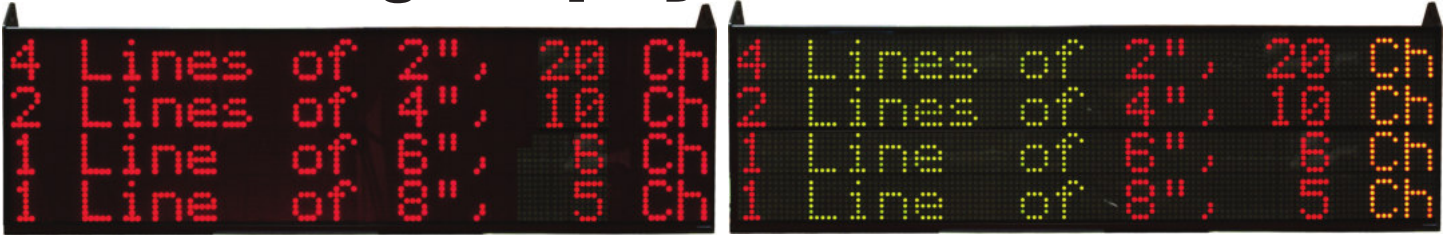

EZMR-4L20C-OUT

EZMRH-4L20C-OUT

EZMT-4L20C-OUT



EZMR-4L40C-OUT

EZMRH-4L40C-OUT



EZMT-4L40C-OUT

EZMarquee Specifications (OUTDOOR)

Part Number	EZMR-4L20C-OUT EZMR-4L20C-E-OUT EZMR-4L20C-D-OUT EZMR-4L20C-P-OUT EZMRH-4L20C-OUT EZMRH-4L20C-E-OUT EZMRH-4L20C-D-OUT EZMRH-4L20C-P-OUT	EZMT-4L20C-OUT EZMT-4L20C-E-OUT EZMT-4L20C-D-OUT EZMT-4L20C-P-OUT	EZMR-4L40C-OUT EZMR-4L40C-E-OUT EZMR-4L40C-D-OUT EZMR-4L40C-P-OUT EZMRH-4L40C-OUT EZMRH-4L40C-E-OUT EZMRH-4L40C-D-OUT EZMRH-4L40C-P-OUT	EZMT-4L40C-OUT EZMT-4L40C-E-OUT EZMT-4L40C-D-OUT EZMT-4L40C-P-OUT
Outdoor Model	RED LED	TRI-Color LED	RED LED	TRI-Color LED
High-bright Model	RED Sunlight Readable 8000 nits		RED Sunlight Readable 8000 nits	
Specification	4 Lines of 20 Char (2")		4 Lines of 40 Char (2")	
Max. View Dist.	400 Feet with 8" Characters			
Power	55 watts	100 watts	100 watts	180 watts
Approvals	UL, CUL, CE (File no. E209355)			
Enclosure	NEMA 4X			
Operating Temp.	-20° to 60° C Ambient			
Storage Temp.	-40° to 95° C Ambient			
Humidity	10% to 95% RH, Non-Condensing			
Input Power	110/220 VAC, 47-63Hz			
Electrical Interference/Tolerance	NEMA ICS 2-230 Showering Arc Test ANSI C37.90a-1974 (SWC) Surge With-Stand Capability Test			
Vibration	5 - 55 Hz 2G for 2 hours in the X, Y, and Z axis			
Shock	10G for under 12ms in the X, Y, and Z axis			
Serial Comm.	Port 1 RS232; Port 2 RS422/485			
External Dim.	36.577" x 11.720" x 2.750" (929.06 x 297.69 x 69.85mm)		72.450" x 11.720" x 3.98" (1840.24 x 297.69 x 101.09mm)	
Weight	15 lbs	16 lbs	30 lbs	32 lbs