

OUTDOOR Large Displays 1L10C and 2L10C



EZMR-1L10C-OUT
EZMRH-1L10C-OUT



EZMR-2L10C-OUT
EZMRH-2L10C-OUT



EZMT-1L10C-OUT



EZMT-2L10C-OUT

EZMarquee Specifications (OUTDOOR)

Part Number	EZMR-1L10C-OUT EZMR-1L10C-E-OUT EZMR-1L10C-D-OUT EZMR-1L10C-P-OUT EZMRH-1L10C-OUT EZMRH-1L10C-E-OUT EZMRH-1L10C-D-OUT EZMRH-1L10C-P-OUT	EZMT-1L10C-OUT EZMT-1L10C-E-OUT EZMT-1L10C-D-OUT EZMT-1L10C-P-OUT	EZMR-2L10C-OUT EZMR-2L10C-E-OUT EZMR-2L10C-D-OUT EZMR-2L10C-P-OUT EZMRH-2L10C-OUT EZMRH-2L10C-E-OUT EZMRH-2L10C-D-OUT EZMRH-2L10C-P-OUT	EZMT-2L10C-OUT EZMT-2L10C-E-OUT EZMT-2L10C-D-OUT EZMT-2L10C-P-OUT
Outdoor Model	RED LED	TRI-Color LED	RED LED	TRI-Color LED
High-bright Model	RED Sunlight Readable 8000 nits		RED Sunlight Readable 8000 nits	
Specification	1 Line of 10 Char (2")		2 Lines of 10 Char (2")	
Max. Viewable Distance	100 Feet with 2" Characters		200 Feet with 4" Characters	
Power	8 watts	14 watts	15 watts	28 watts
Approvals	UL, CUL, CE			
Enclosure	NEMA 4X			
Operating Temp.	-20° to 60° C Ambient			
Storage Temp.	-40° to 95° C Ambient			
Humidity	10% to 95% RH, Non-Condensing			
Input Power	110/220 VAC, 47-63Hz			
Electrical Interference	NEMA ICS 2-230 Showering Arc Test			
Electrical Tolerance	ANSI C37.90a-1974 (SWC) Surge With-Stand Capability Test			
Vibration	5 - 55 Hz 2G for 2 hours in the X, Y, and Z axis			
Shock	10G for under 12ms in the X, Y, and Z axis			
Serial Comm.	Port 1 RS232; Port 2 RS422/485			
External Dim.	18.9" x 4.8" x 2.8" (479.25 x 121.43 x 69.85mm)		18.9" x 6.2" x 2.8" (479.25 x 156.13 x 69.85mm)	
Weight	2.8 lbs	3 lbs	5 lbs	5.2 lbs

OUTDOOR Large Displays 1L20C and 1L40C

1 Line of 2", 20 Cha

EZMR-1L20C-OUT
EZMRH-1L20C-OUT

1 Line of 2", 20 Cha

EZMT-1L20COUT

1 Line of 2", 40 Characters Per line

EZMR-1L40C-OUT
EZMRH-1L40C-OUT

1 Line of 2", 40 Characters Per line

EZMT-1L40C-OUT

EZMarquee Specifications (OUTDOOR)

Part Number	EZMR-1L20C-OUT EZMR-1L20C-E-OUT EZMR-1L20C-D-OUT EZMR-1L20C-P-OUT EZMRH-1L20C-OUT EZMRH-1L20C-E-OUT EZMRH-1L20C-D-OUT EZMRH-1L20C-P-OUT	EZMT-1L20C-OUT EZMT-1L20C-E-OUT EZMT-1L20C-D-OUT EZMT-1L20C-P-OUT	EZMR-1L40C-OUT EZMR-1L40C-E-OUT EZMR-1L40C-D-OUT EZMR-1L40C-P-OUT EZMRH-1L40C-OUT EZMRH-1L40C-E-OUT EZMRH-1L40C-D-OUT EZMRH-1L40C-P-OUT	EZMT-1L40C-OUT EZMT-1L40C-E-OUT EZMT-1L40C-D-OUT EZMT-1L40C-P-OUT
Outdoor Model	RED LED	TRI-Color LED	RED LED	TRI-Color LED
High-bright Model	RED Sunlight Readable 8000 nits		RED Sunlight Readable 8000 nits	
Specification	1 Line of 20 Char (2")		1 Lines of 40 Char (2")	
Max. Viewable Distance	100 Feet with 2" Characters			
Power	15 watts	28 watts	30 watts	60 watts
Approvals	UL, CUL, CE			
Enclosure	NEMA 4X			
Operating Temp.	-20° to 60° C Ambient			
Storage Temp.	-40° to 95° C Ambient			
Humidity	10% to 95% RH, Non-Condensing			
Input Power	110/220 VAC, 47-63Hz			
Electrical Interference	NEMA ICS 2-230 Showering Arc Test			
Electrical Tolerance	ANSI C37.90a-1974 (SWC) Surge With-Stand Capability Test			
Vibration	5 - 55 Hz 2G for 2 hours in the X, Y, and Z axis			
Shock	10G for under 12ms in the X, Y, and Z axis			
Serial Comm.	Port 1 RS232; Port 2 RS422/485			
External Dim.	36.9" x 4.8" x 2.8" (936.44 x 121.43 x 69.85mm)		72.1" x 5.4" x 2.8" (1831.31 x 106.35 x 69.85mm)	
Weight	4.5 lbs	4.8 lbs	8 lbs	8.5 lbs

OUTDOOR Large Displays 2L20C and 2L40C



EZMR-2L20C-OUT EZMRH-2L20C-OUT



EZMT-2L20C-OUT



EZMR-2L40C-OUT EZMRH-2L40C-OUT



EZMT-2L40C-OUT

EZMarquee Specifications (OUTDOOR)

Part Number	EZMR-2L20C-OUT EZMR-2L20C-E-OUT EZMR-2L20C-D-OUT EZMR-2L20C-P-OUT EZMRH-2L20C-OUT EZMRH-2L20C-E-OUT EZMRH-2L20C-D-OUT EZMRH-2L20C-P-OUT	EZMT-2L20C-OUT EZMT-2L20C-E-OUT EZMT-2L20C-D-OUT EZMT-2L20C-P-OUT	EZMR-2L40C-OUT EZMR-2L40C-E-OUT EZMR-2L40C-D-OUT EZMR-2L40C-P-OUT EZMRH-2L40C-OUT EZMRH-2L40C-E-OUT EZMRH-2L40C-D-OUT EZMRH-2L40C-P-OUT	EZMT-2L40C-OUT EZMT-2L40C-E-OUT EZMT-2L40C-D-OUT EZMT-2L40C-P-OUT
Outdoor Model	RED LED	TRI-Color LED	RED LED	TRI-Color LED
High-bright Model	RED Sunlight Readable 8000 nits		RED Sunlight Readable 8000 nits	
Specification	2 Lines of 20 Char (2")		2 Lines of 40 Char (2")	
Max. View Dist.	200 Feet with 4" Characters			
Power	30 watts	55 watts	54 watts	100 watts
Approvals	UL, CUL, CE (File no. E209355)			
Enclosure	NEMA 4X			
Operating Temp.	-20° to 60° C Ambient			
Storage Temp.	-40° to 95° C Ambient			
Humidity	10% to 95% RH, Non-Condensing			
Input Power	110/220 VAC, 47-63Hz			
Electrical Interference/Tolerance	NEMA ICS 2-230 Showering Arc Test ANSI C37.90a-1974 (SWC) Surge With-Stand Capability Test			
Vibration	5 - 55 Hz 2G for 2 hours in the X, Y, and Z axis			
Shock	10G for under 12ms in the X, Y, and Z axis			
Serial Comm.	RS232/422/485			
External Dim.	36.86" x 5.67" x 2.75" (936.44 x 144.02 x 69.85mm)		72.1" x 5.67" x 2.75" (1831.31 x 144.02 x 69.85mm)	
Weight	8 lbs	8.5 lbs	15 lbs	16 lbs

OUTDOOR Large Displays 4L20C and 4L40C



EZMR-4L20C-OUT


EZMRH-4L20C-OUT

EZMT-4L20C-OUT



EZMR-4L40C-OUT

EZMRH-4L40C-OUT

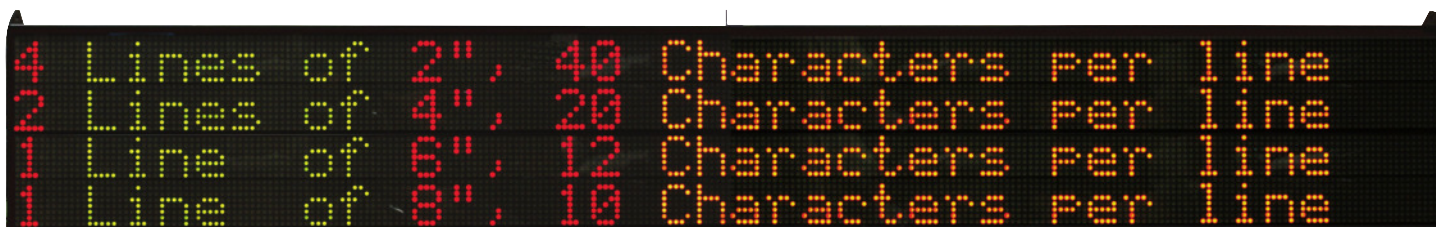

EZMT-4L40C-OUT

EZMarquee Specifications (OUTDOOR)

Part Number	EZMR-4L20C-OUT EZMR-4L20C-E-OUT EZMR-4L20C-D-OUT EZMR-4L20C-P-OUT EZMRH-4L20C-OUT EZMRH-4L20C-E-OUT EZMRH-4L20C-D-OUT EZMRH-4L20C-P-OUT	EZMT-4L20C-OUT EZMT-4L20C-E-OUT EZMT-4L20C-D-OUT EZMT-4L20C-P-OUT	EZMR-4L40C-OUT EZMR-4L40C-E-OUT EZMR-4L40C-D-OUT EZMR-4L40C-P-OUT EZMRH-4L40C-OUT EZMRH-4L40C-E-OUT EZMRH-4L40C-D-OUT EZMRH-4L40C-P-OUT	EZMT-4L40C-OUT EZMT-4L40C-E-OUT EZMT-4L40C-D-OUT EZMT-4L40C-P-OUT
Outdoor Model	RED LED	TRI-Color LED	RED LED	TRI-Color LED
High-bright Model	RED Sunlight Readable 8000 nits		RED Sunlight Readable 8000 nits	
Specification	4 Lines of 20 Char (2")		4 Lines of 40 Char (2")	
Max. View Dist.	400 Feet with 8" Characters			
Power	55 watts	100 watts	100 watts	180 watts
Approvals	UL, CUL, CE (File no. E209355)			
Enclosure	NEMA 4X			
Operating Temp.	-20° to 60° C Ambient			
Storage Temp.	-40° to 95° C Ambient			
Humidity	10% to 95% RH, Non-Condensing			
Input Power	110/220 VAC, 47-63Hz			
Electrical Interference/Tolerance	NEMA ICS 2-230 Showering Arc Test			
	ANSI C37.90a-1974 (SWC) Surge With-Stand Capability Test			
Vibration	5 - 55 Hz 2G for 2 hours in the X, Y, and Z axis			
Shock	10G for under 12ms in the X, Y, and Z axis			
Serial Comm.	Port 1 RS232; Port 2 RS422/485			
External Dim.	36.577" x 11.720" x 2.750" (929.06 x 297.69 x 69.85mm)		72.450" x 11.720" x 3.98" (1840.24 x 297.69 x 101.09mm)	
Weight	15 lbs	16 lbs	30 lbs	32 lbs